



## DELTA KR IP65

Recessed Mounted 12 W Spot LED Luminaire

Order Code : 3296449  
Product Code : DLT 012A 40LN00 36 1K1 65 KR FLP



### Product Data

#### Standard Features


Housing	: Aluminium Housing
Optic	: 36° Lens
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 12 W
Final Luminous Flux	: 1023,12 lm
Efficacy	: 85,26 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

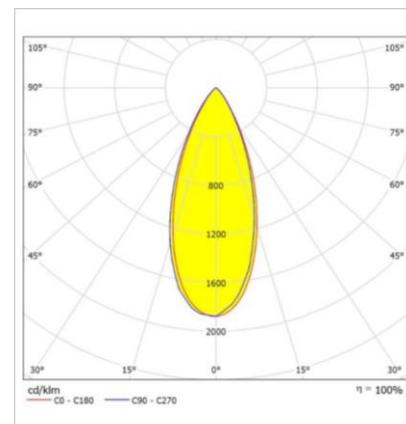

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 24° / 60°



## DELTA KR IP65

Recessed Mounted 12 W Spot LED Luminaire

3296449 DLT 012A 40LN00 36 1K1 65 KR FLP

### Dimensions (mm)


	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Standart	100	100	85	92x92

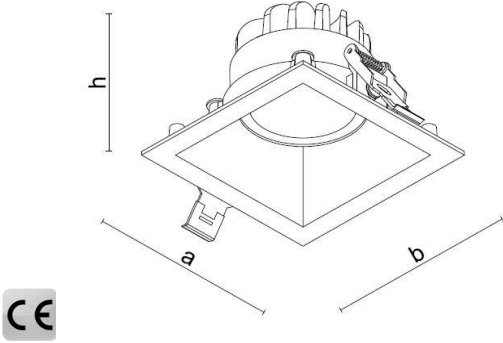


### Weight (kg)

Standard

### On-Off Driver / DALI Driver IP65 Box

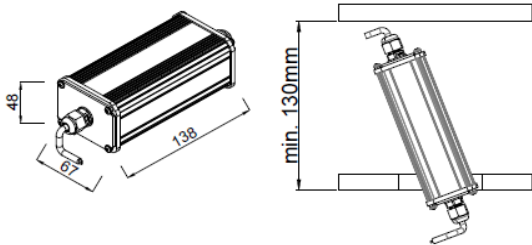

### On-Off Driver / DALI Driver + Emergency Kit IP65 Box

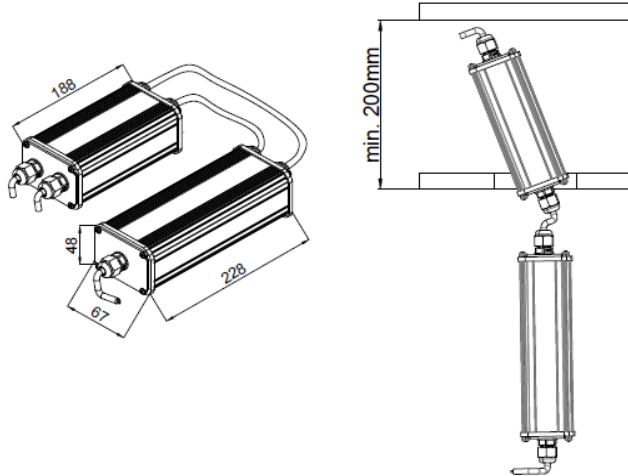

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 6.03.2024