



# BLADE

Recessed Mounted 14 W Spot LED Luminaire

Order Code : 3295093  
Product Code : BLD 014A 40SD00 36 1K6 20 YV FLP



## Product Data

### Standard Features

Housing	: Aluminium housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On-Off

### Optical & Electrical Features


Power Consumption	: 14 W
Final Luminous Flux	: 1552 lm
Efficacy	: 110 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

## Photometric Curve

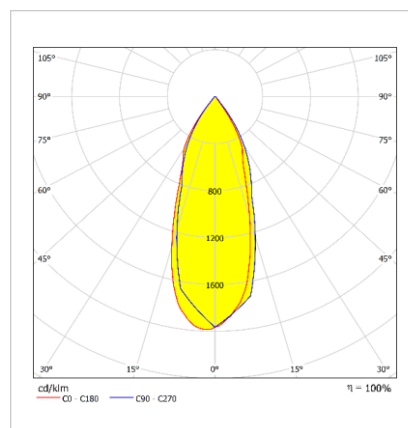

### Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°



# BLADE

## Recessed Mounted 14 W Spot LED Luminaire

3295093 BLD 014A 40SD00 36 1K6 20 YV FLP



### Dimensions (mm)

	Ø	h	Ø D
Standart	85	85	76

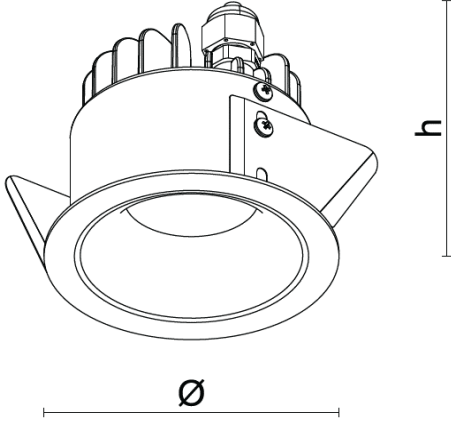

### Weight (kg)

Standart	0.240
----------	-------



- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date:15.02.2023