



BISTA-Y MINI ADJUSTABLE

Recessed Mounted 6 W Spot LED Luminaire

Order Code : 3298213
Product Code : BST 006A 40SD00 36 0K6 MN YV ADJ FLP



Product Data

Standard Features


| | |
|--------------------|---------------------|
| Housing | : Aluminium Housing |
| Optic | : 36° Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Recessed Mounted |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 6 W |
| Final Luminous Flux | : 690 lm |
| Efficacy | : 115lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

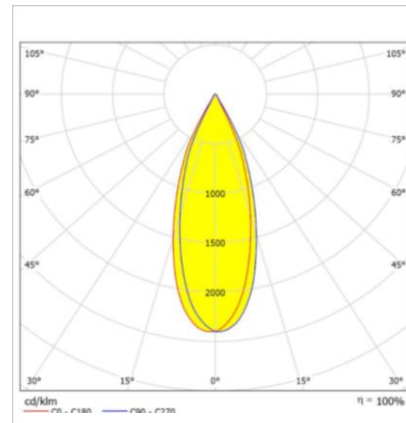

Other Features & Conditions

| | |
|----------------------------------|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Operating Temperature Range With | : +5 °C / +35 °C |
| Emergency Kit | |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |

Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : 1 / 3 hours |
| DALI Option | : Yes |
| Degree Option | : 24° / 60° |



BISTA-Y MINI ADJUSTABLE

Recessed Mounted 6 W Spot LED Luminaire

3298213 BST 006A 40SD00 36 0K6 MN YV ADJ FLP

Dimensions (mm)

| | Ø | h | ØD |
|----------|-----|-----|----|
| Standard | 100 | 115 | 92 |

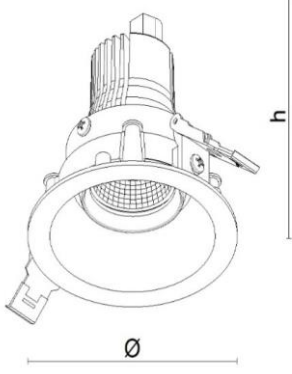

Weight (kg)

| | |
|----------|-------|
| Standard | 0.350 |
|----------|-------|



- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 9.07.2024