



### Recessed Mounted 10 W Spot LED Luminaire

## Standard Features

Power Consumption	: 10 W
Final Luminous Flux	: 1080 lm
Efficacy	: 108 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

## Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5°C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

## Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°



## BISTA-Y MINI ADJUSTABLE

Recessed Mounted 10 W Spot LED Luminaire

3298215 BST 010A 40SD00 36 1K1 MN YV ADJ FLP

### Dimensions (mm)

	Ø	h	ØD
Standard	100	115	92

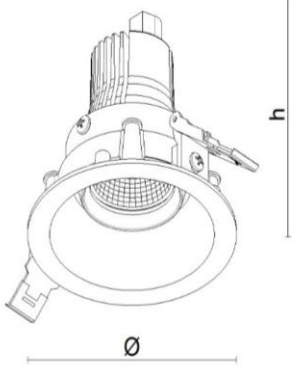

### Weight (kg)

Standard	0.350
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 9.07.2024