



BISTA-Y MINI ADJUSTABLE

Recessed Mounted 12 W Spot LED Luminaire

Order Code : 3298216
Product Code : BST 012A 40SD00 36 1K2 MN YV ADJ FLP



Product Data

Standard Features


Housing	: Aluminium Housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 12 W
Final Luminous Flux	: 1288,8 lm
Efficacy	: 107,4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

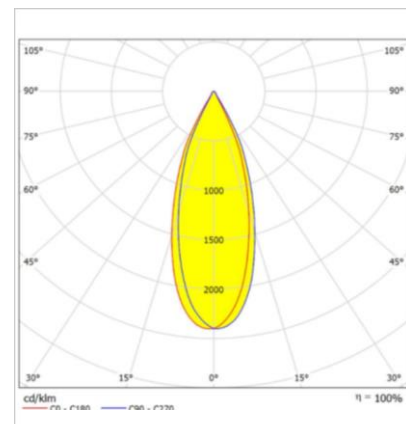

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°



BISTA-Y MINI ADJUSTABLE

Recessed Mounted 12 W Spot LED Luminaire

3298216 BST 012A 40SD00 36 1K2 MN YV ADJ FLP

Dimensions (mm)

	Ø	h	ØD
Standard	100	115	92

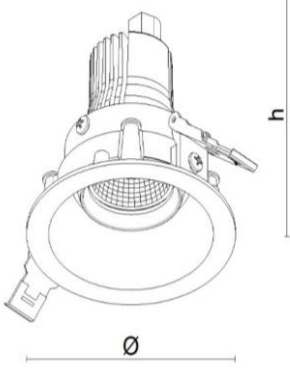

Weight (kg)

Standard	0.350
----------	-------



- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 9.07.2024