



TOWER POLE

20 W Paysage LED Lighting Luminaire

Order Code : 3271469
Product Code : TWR 020Z 40CM00 LLL 66 PL 3H FLP



Product Data

Standard Features

Housing	: Aluminium Housing
Diffuser	: 4mm Glass
IP Grade	: IP66
Installation	: Floor mounted
Light Source	: COB LED
Electronic Control	: On/Off

Photometric Curve

Optical & Electrical Features

Power Consumption	: 20 W
Final Luminous Flux	: 1052 lm
Efficacy	: 52,6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C / +45 °C
Impact Resistance	: IK06
Led Life Time - L70	: > 72.000 hours @Ta= 45 °C

Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


TOWER POLE

20 W Paysage LED Lighting Luminaire

3271469 TWR 020Z 40CM00 LLL 66 PL 3H FLP

Dimensions (mm)

	a	b	h
Standart	150	150	3000

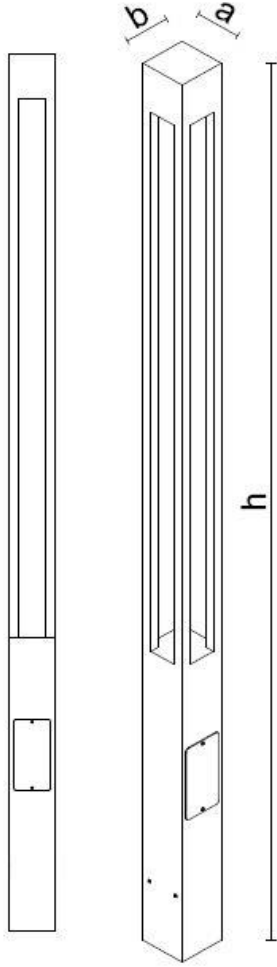

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 6.06.2024