EAE
LIGHTING

REVOLED-S

Light Engineering in the Industry

Revoled-S

Luminaire Series

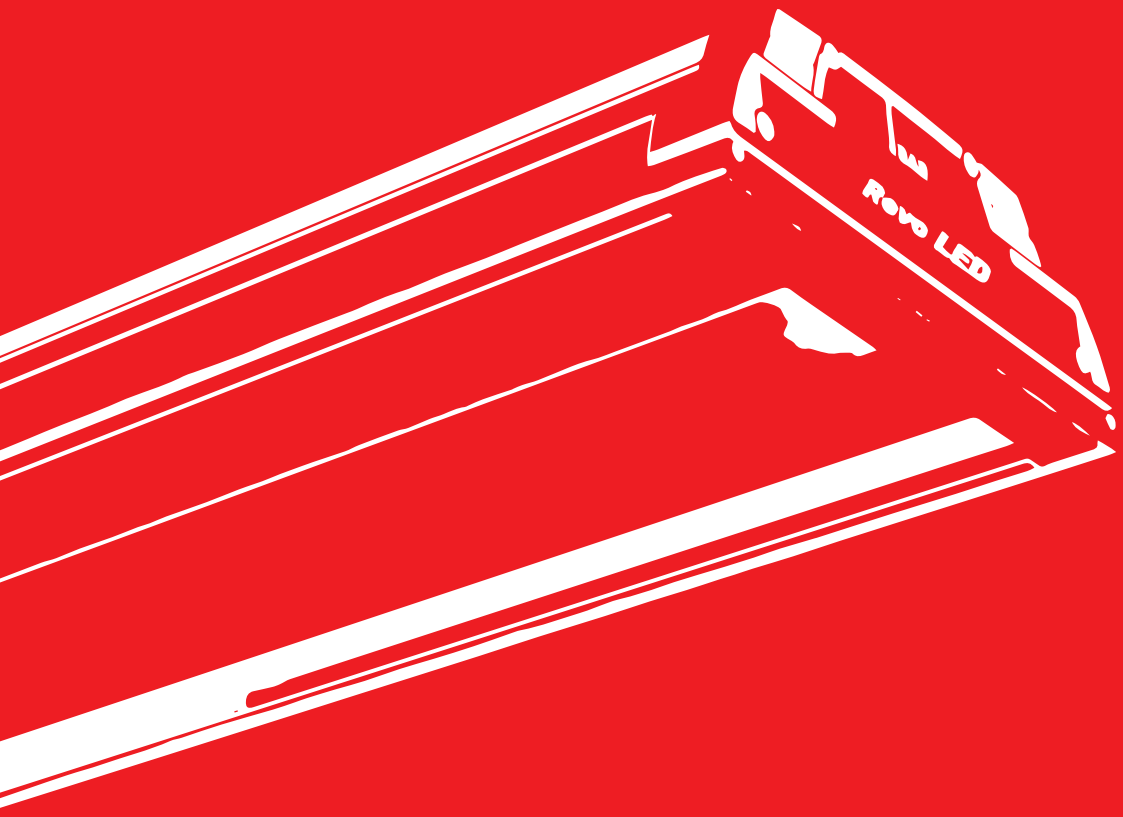

Revoled-S SC V.3	LOWBAY (90°)	UGR < 22	-25°C... +45°C		**10**
Revoled-S SC V.3 INDUSTRY	LOWBAY (90°)	UGR < 22	-40°C... +60°C		**12**
Revoled-S SC V.3 EVOLUTION	LOWBAY (90°)	UGR < 22	-25°C... +40°C	ECONOMIC	**14**
Revoled-S V.3	ARENA (60°), LOWBAY (90°)	UGR < 25	-25°C... +45°C		**16**
Revoled-S V.3 INDUSTRY	ARENA (60°), LOWBAY (90°)	UGR < 25	-40°C... +60°C		**18**
Revoled-S V.3 INDUSTRY PLUS +	ARENA (60°), LOWBAY (90°)	UGR < 25	-40°C... +75°C		**19**
Revoled-S V.3 EVOLUTION	ARENA (60°), LOWBAY (90°)	UGR < 25	-25°C... +40°C	ECONOMIC	**20**
Revoled-S V.2	RAF (30°)	UGR < 22	-25°C... +45°C		**21**
Revoled-S V.2 EVOLUTION	RAF (30°)	UGR < 25	-25°C... +40°C	ECONOMIC	**22**

Arena > 8m
Lowbay < 8m
Raf > 8m For shelving storage facilities

SYSTEM

Easy to operate without intervention from the product glass energy connection possibility...

L,N,GND

D1, D2

JOINT TYPES

Optionally, Revoled-S, suitable to needs of automation systems and Emergency cases, energy, automation and emergency case conductive inputs can separately be made.

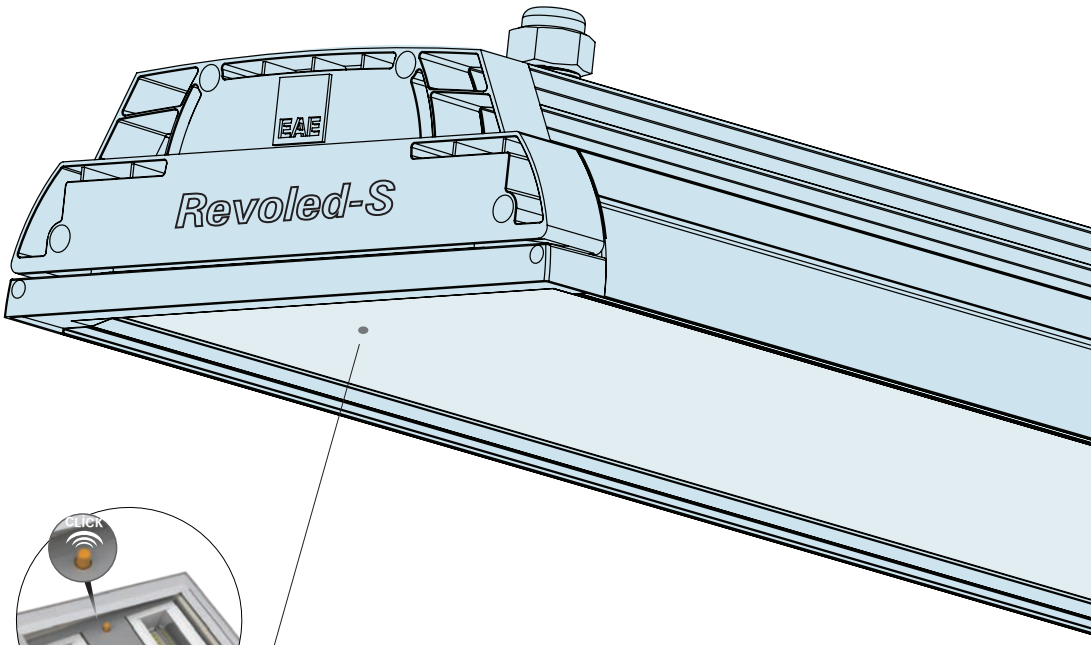



SECURITY SWITCH

Risk is eliminated during action periods because armature power is cut through switch while opening the framework.

OVERVIEW

IP65 HOUSING AND IMPERMEABLE SEAL

REVOLED-S, obtained IP65 housing structure, can be used in many areas in the industry. Impermeable seal endures low and high temperature.

HOUSING SPECIFICATIONS

It does not allow dust and particle accumulation, thanks to its patented body structure, and water drops, might be occurred in moist air, and cannot be settled in its oval shape.

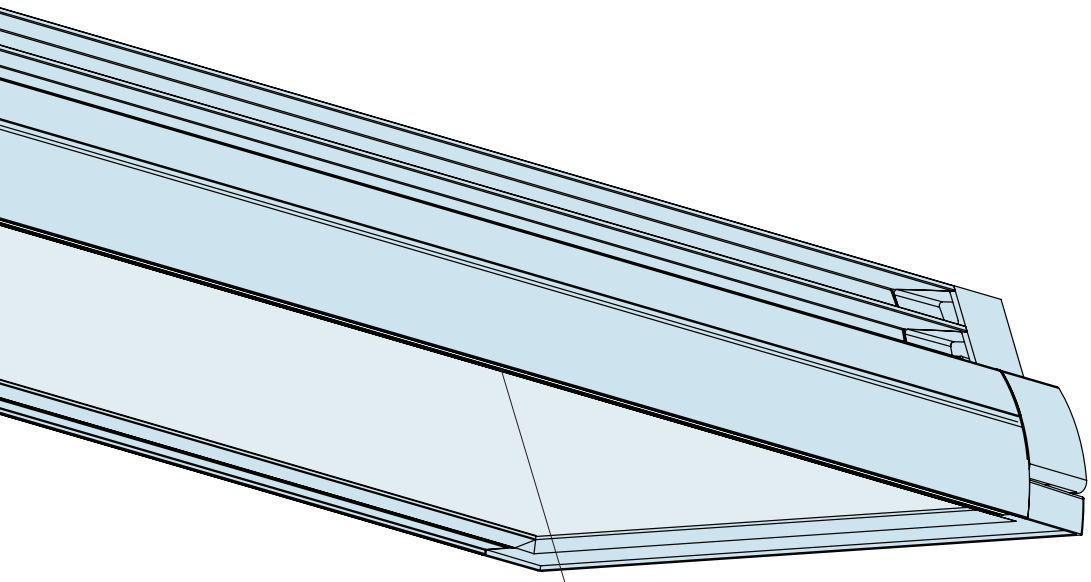

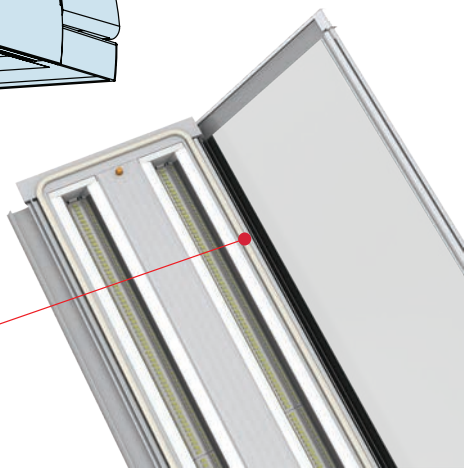

TEMPERED GLASS

Armature glass is tempered and also be covered by security film which disenable glass parts to spread.

HOUSING STRUCTURE

EASY ACTION

Armature front cover can easily be opened and action can be accordingly taken.

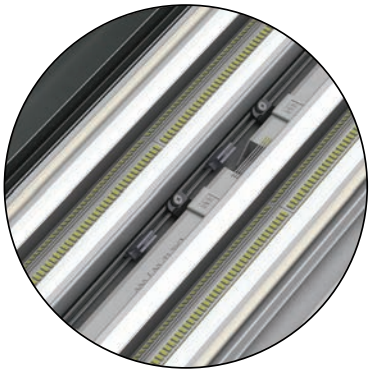

EASY ACCESS TO ELECTRONIC COMPONENTS

Glass cover can be opened so that necessary action can easily be taken in case of any errors.

MONTAGE APPARATES

It can easily be installed to bus and cable channel with the bracket, which is particularly designed for Revoled-S.

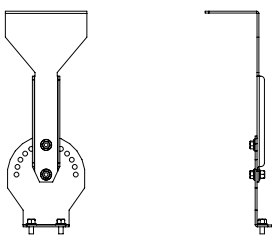

Level Bracket

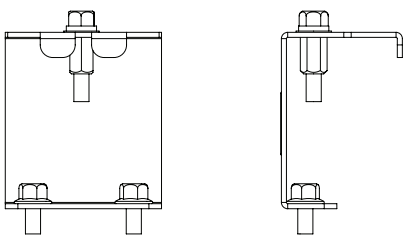

Cable Channel Bracket

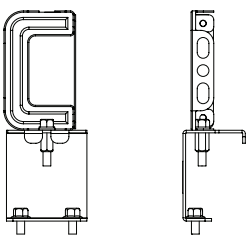

Bus Bracket

WHY REVOLED-S?

EAE LIGHTING

ENERGY SAVING 1

With productivity level of 150 lm/W, Revoled-S provides energy saving of 77% compared to metal armatures and of 58% compared to Fluorescent high ceiling armatures.

STABLE LIGHT LEVEL 2

Toward the end of use, Revoled-S armature has light loss up to maximum 10% while high pressure armatures have 50% and Fluorescent armatures have 20%.

ENVIRONMENT-FRIENDLY 3

Known as a poisonous gas, mercury is used in high pressure and Fluorescent bulbs to some extent. However, Mercury is not found in Led light sources.

LONG LASTING 4

Led light sources can be used longer 2-3 times compared to Fluorescent bulbs and 6-8 times compared to metal bulbs.

INSTANT LIGHTING AND LIGHT CONTROL FACILITIES 5

5-10 min regime duration, which is required for high pressure armature to re-light in case of a power cut, constitutes a big problem for firms and magnetic ballasts, not to be dimmed, does not enable automation.

ZERO-ERROR MANAGEMENT 6

Action necessity for bulbs errors especially in high ceiling systems could be eliminated through led armatures.

HIGH COLOR RENDERING 7

Revoled-S armatures obtain high level of CRI (color rendering index) as >80 like Fluorescent armatures. This specification is especially important for firms, which priorities CRI, including textile sector.

JOB SAFETY 8

Armature body structure is endurable against to strong impacts enables for defreeze not to leave the armature even though it is broken and disenable the particles to be accumulated. These features show the compliance with job safety criteria.

REVOLED-S SC V.3

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +45 °C

***UGR < 22** (Glare)*
150 lm/w

REVOLED-S SC V.3 has been designed to meet all criteria of industry from food to automotive sectors. Offering high energy saving, long life time and high work safety.

LED | IP65 | DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	: High reflectance PC reflector
Diffuser	: Tempered glass with safety film
Light Source	: Mid Power LED
Power	: 38 W / 70 W / 106 W / 142 W
Lumen	: 5483 lm / 10345 lm / 15732 lm / 21061 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

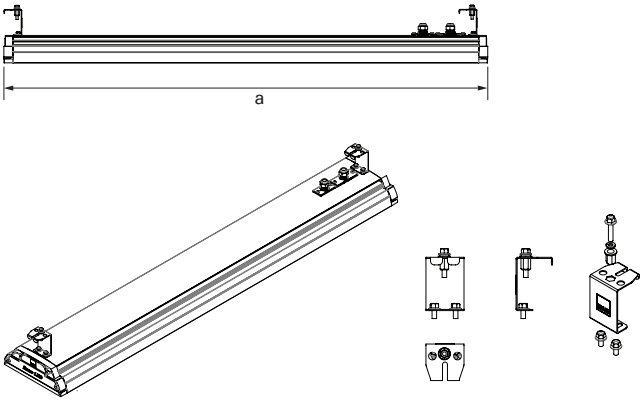

Photometric Curve



Dimensions (mm)

Type	a	b	h
38 W	585	220	74
70 W	688	220	74
106 W	1000	220	74
142 W	1310	220	74

Options

Emergency Kit	: Yes (1-3 hours)
Electronic Control	: DALI / Traceable DALI Kit

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF00 90 5K58 V3 PC	38,1	4
59 W (4000K)	RVL 060U 40TF00 90 8K74 V3 PC	58,9	6,4
70 W (4000K)	RVL 070U 40TF00 90 10K3 V3 PC	70,1	6,4
106 W (4000K)	RVL 106U 40TF00 90 15K7 V3 PC	106,2	9,2
142 W (4000K)	RVL 142U 40TF00 90 21K0 V3 PC	142,2	11,9

Ball Prof | CE | CB | KEMA KEUR | 05 | EAC

EAE

REVOLED-S SC V.3
INDUSTRY

INDUSTRY LIGHTING LED LUMINAIRES

-40 °C +60 °C

***UGR < 22** (Glare)*
150 lm/w

REVOLED-S SC V.3 INDUSTRY, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED | IP65 | DALI

Technical Specifications

Housing	: Aluminium profile housing
Optical	: High reflectance PC reflector
Diffuser	: Tempered glass with safety film
Light Source	: Mid Power LED
Power	: 38 W / 70 W / 106 W / 142 W
Lumen	: 5483 lm / 10345 lm / 15732 lm / 21061 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

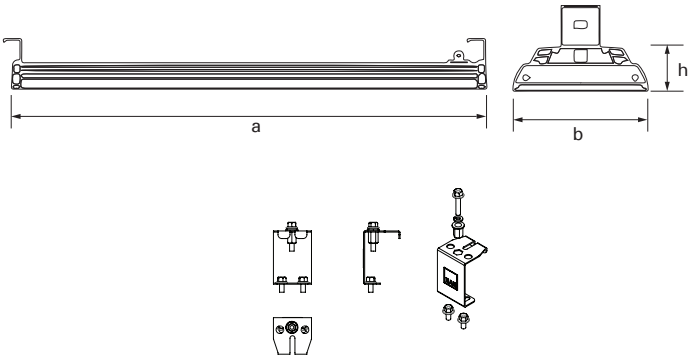

Photometric Curve



Dimensions (mm)

Type	a	b	h
38 W	416	223	75
70 W	688	223	75
106 W	1000	223	75
140 W	1310	223	75

Options

DALI Compatibility : Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF06 90 5K48 V3	38,1	3,7
70 W (4000K)	RVL 070U 40TF06 90 10K3 V3	70,1	6,2
106 W (4000K)	RVL 106U 40TF06 90 15K7 V3	106,2	9,3
140 W (4000K)	RVL 142U 40TF06 90 21K0 V3	142,2	11,9

Ball Prof | CE | CB | KEMA KEUR | 05 | EAC

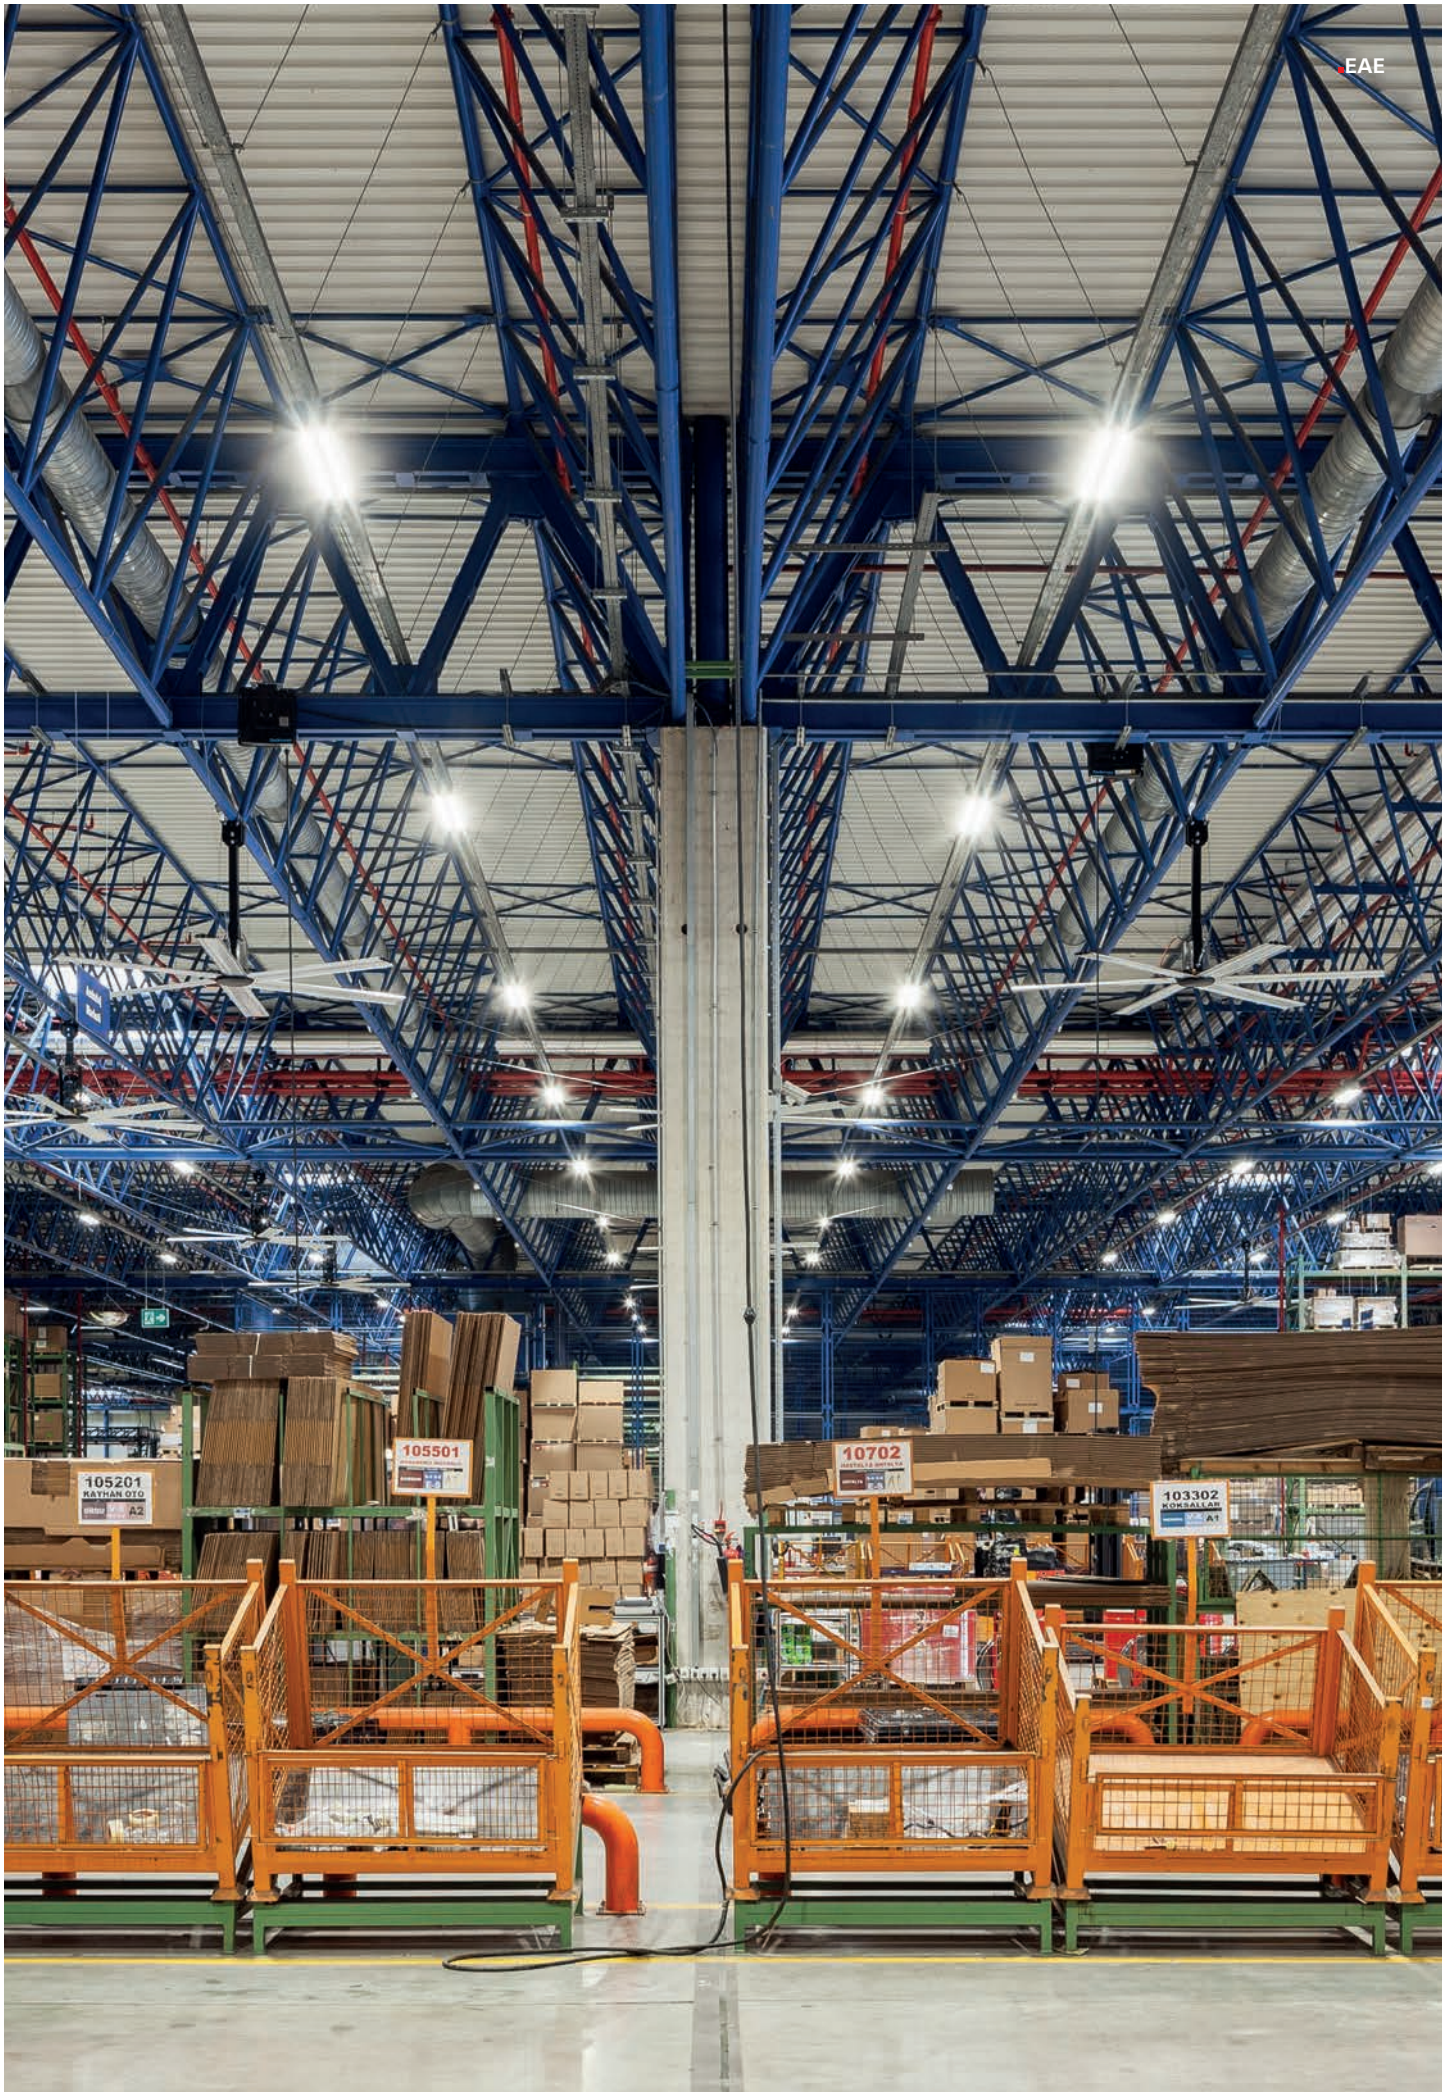
105201
KAYHAN OTO
A2
105501
10702
103302
KOKSALLAR
A1

REVOLED-S SC V.3
EVOLUTION

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +40 °C

***UGR < 22** (Glare)*
145 lm/w

REVOLED-S V.3 SC EVOLUTION has been designed to meet all criteria of industry from food to automotive sectors. Offering high energy saving, long life time and high work safety.

LED | IP65 | DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	: High reflectance PC reflector
Diffuser	: Tempered glass with safety film
Light Source	: Mid Power LED
Power	: 97 W / 127 W / 175 W
Lumen	: 14315 lm / 18987 lm / 25358 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

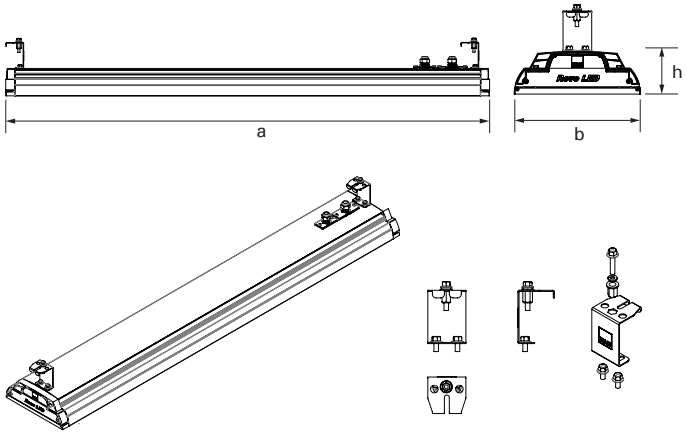

Photometric Curve



Dimensions (mm)

Type	a	b	h
97 W	688	223	75
127 W	1000	223	75
175 W	1310	223	75

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
97 W (4000K)	RVL 097U 40TF00 90 14K3 V3 EVO PC	97,1	6,4
127 W (4000K)	RVL 127U 40TF00 90 18K9 V3 EVO PC	126,8	9,2
175 W (4000K)	RVL 175U 40TF00 90 25K3 V3 EVO PC	175,6	11,9

Ball Prof | CE | CB | KEMA KEUR | 05 | EAC

EAE

REVOLED-S V.3

ARENA (60°) - LOWBAY (90°)

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +45 °C *140 lm/w*

REVOLED-S V.3, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED IP65 DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	: Miro silver reflector
Diffuser	
Arena	: Narrow angle, safety tempered glass
Lowbay	: Wide angle, safety tempered glass
Light Source	: Mid Power LED
Power	
Arena	: 38 W / 74 W / 112 W / 137 W
Lowbay	: 38 W / 74 W / 112 W / 137 W
Lumen	
Arena	: 5497 lm / 10944 lm / 15297 lm / 19085 lm
Lowbay	: 5581 lm / 10969 lm / 15320 lm / 19460 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

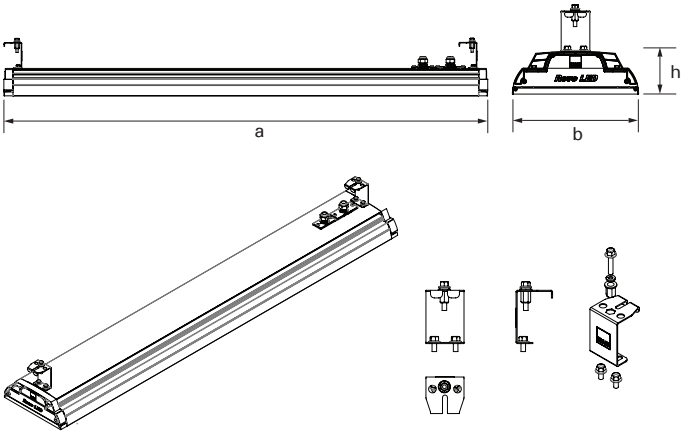

Dimensions (mm)

ARENA

Type	a	b	h
38 W	416	223	75
74 W	688	223	75
112 W	1000	223	75
137 W	1310	223	75

LOWBAY

Type	a	b	h
38 W	416	223	75
74 W	688	223	75
112 W	1000	223	75
137 W	1310	223	75

Photometric Curve



ARENA



LOWBAY

Purchase Order Table

Arena

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF00 AR 5K49 V3 PC	37,9	3,7
74 W (4000K)	RVL 074U 40TF00 AR 10K9 V3 PC	73,8	6,2
112 W (4000K)	RVL 112U 40TF00 AR 15K2 V3 PC	111,8	9,3
137 W (4000K)	RVL 137U 40TF00 AR 19K4 V3 PC	136,8	11,9

Lowbay

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF00 LB 5K58 V3 PC	38,3	3,7
74 W (4000K)	RVL 074U 40TF00 LB 10K9 V3 PC	73,7	6,2
112 W (4000K)	RVL 110U 40TF00 LB 15K7 V3 PC	109,6	9,3
137 W (4000K)	RVL 137U 40TF00 LB 19K4 V3 PC	137,8	11,9

Options

Emergency Kit	: Yes (1-3 hours)
Electronic Control	: DALI / Traceable DALI Kit

Ball Prof CE CB KEMA KEUR 05 EAC

REVOLED-S V.3

INDUSTRY

ARENA (60°) - LOWBAY (90°)

INDUSTRY LIGHTING LED LUMINAIRES

-40 °C +60 °C 140 lm/w

REVOLED-S V.3 INDUSTRY, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED IP65 DALI

Technical Specifications*

Housing	: Aluminium profile housing
Optical	: Miro silver reflector
Diffuser	
Arena	: Narrow angle, safety tempered glass
Lowbay	: Wide angle, safety tempered glass
Light Source	: Mid Power LED
Power	
Arena	: 38 W / 74 W / 112 W / 137 W
Lowbay	: 38 W / 74 W / 112 W / 137 W
Lumen	
Arena	: 5497 lm / 10944 lm / 15297 lm / 19084 lm
Lowbay	: 5581 lm / 10969 lm / 15320 lm / 19459 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

* Technical specifications have ± %5 tolerance.

Technical Drawing

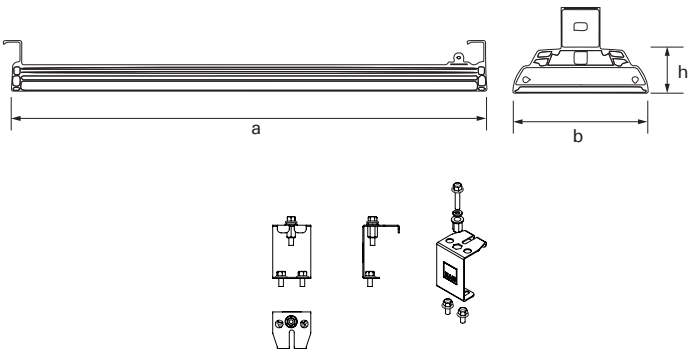

Dimensions (mm)

ARENA Model

Type	a	b	h
38 W	416	223	75
74 W	688	223	75
112 W	1000	223	75
137 W	1310	223	75

LOWBAY Model

Type	a	b	h
38 W	416	223	75
74 W	688	223	75
112 W	1000	223	75
137 W	1310	223	75

Photometric Curve



ARENA



LOWBAY

Purchase Order Table

Arena

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF06 AR 5K49 V3	37,9	3,7
74 W (4000K)	RVL 074U 40TF06 AR 10K9 V3	73,8	6,2
112 W (4000K)	RVL 112U 40TF06 AR 15K2 V3	111,8	9,3
137 W (4000K)	RVL 137U 40TF06 AR 19K0 V3	136,8	11,9

Lowbay

Product Type	Product Code	Power (W)	Weight (kg)
38 W (4000K)	RVL 038U 40TF06 LB 5K58 V3	38,3	3,7
74 W (4000K)	RVL 074U 40TF06 LB 10K9 V3	73,7	6,2
137 W (4000K)	RVL 137U 40TF06 LB 19K4 V3	137,8	11,9

Options

DALI Compatibility : Yes

Ball Prof CE CB KEMA KEUR 05 EAC

REVOLED-S V.3
INDUSTRY PLUS +

INDUSTRY LIGHTING LED LUMINAIRES

-40 °C +75 °C **160 lm/w**

REVOLED-S V.3 INDUSTRY PLUS +, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED | IP65 | DALI

Technical Specifications

Housing	: Aluminium profile housing
Optical	: Miro silver reflector
Diffuser	: Narrow angle, safety tempered glass
Light Source	: Mid Power LED
Power	: 30 W / 60 W / 90 W / 120 W
Lumen	: 4353 lm / 9418 lm / 13674 lm / 18847 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

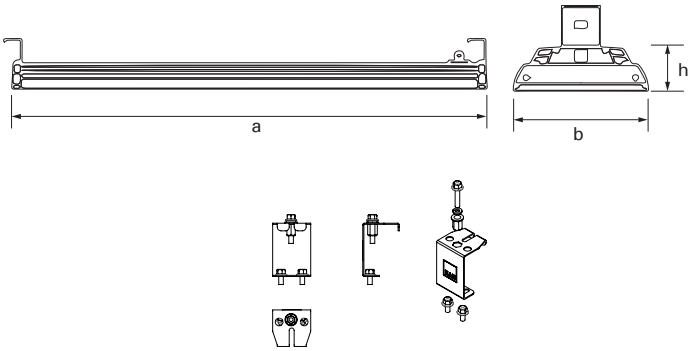

Dimensions (mm)

Type	a	b	h
30 W	608	220	78
60 W	846	220	78
90 W	1234	220	78
120 W	1620	220	78

Photometric Curve



Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
30 W (4000K)	RVL 030U 40TF06 AR 4K35 V3 70D	27,7	5,5
60 W (4000K)	RVL 060U 40TF06 AR 9K41 V3 70D	60,9	7,6
90 W (4000K)	RVL 090U 40TF06 AR 13K6 V3 70D	89,7	10,5
120 W (4000K)	RVL 120U 40TF06 AR 18K2 V3 70D	121,9	14,8

Options

DALI Compatibility : Yes

Ball Prof | CE | CB | KEMA KEUR | 05 | EAC

REVOLED-S V.3

EVOLUTION

ARENA (60°) - LOWBAY (90°)

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +40 °C 145 lm/w

REVOLED-S EVOLUTION V.3 has been designed to meet all criteria of industry from food to automotive sectors. Offering high energy saving, long life time and high work safety.

LED IP65 DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	
Arena	: Miro silver reflector, narrow angle
Lowbay	: Miro silver reflector, wide angle
Diffuser	: Tempered glass with safety film
Light Source	: Mid Power LED
Power	
Arena	: 65 W / 96 W / 130 W / 137 W / 183 W
Lowbay	: 65 W / 96 W / 130 W / 133 W / 183 W
Lumen	
Arena	: 8809 lm / 14179 lm / 19186 lm / 20157 lm / 26658 lm
Lowbay	: 8877 lm / 14355 lm / 19394 lm / 19865 lm / 26934 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

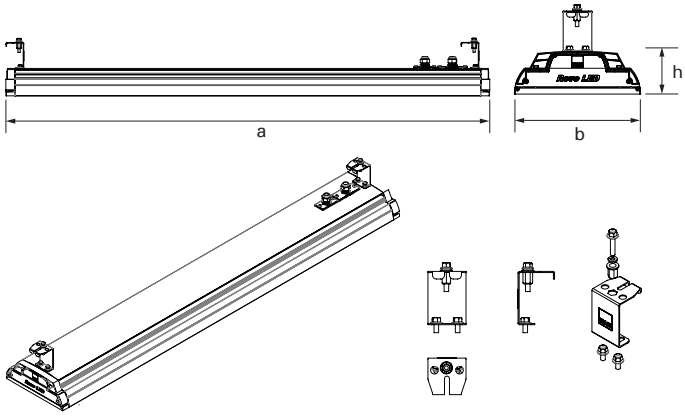

Dimensions (mm)

ARENA

Type	a	b	h
65 W	416	223	75
96 W	688	223	75
130 W/137 W	1000	223	75
183 W	1310	223	75

LOWBAY

Type	a	b	h
65 W	416	223	75
96 W	688	223	75
130 W/133 W	1000	223	75
183 W	1310	223	75

Photometric Curve



ARENA



LOWBAY

Purchase Order Table

Arena

Product Type	Product Code	Power (W)	Weight (kg)
65 W (4000K)	RVL 065U 40TF00 AR 8K80 V3 EVO PC	65,3	3,7
96 W (4000K)	RVL 096U 40TF00 AR 14K1 V3 EVO PC	96,4	6,2
130 W (4000K)	RVL 130U 40TF00 AR 19K1 V3 EVO PC	130,8	9,3
137 W (4000K)	RVL 137U 40TF00 AR 20K1 V3 EVO PC	137,5	9,3
183 W (4000K)	RVL 183U 40TF00 AR 26K6 V3 EVO PC	182,4	9,3

Lowbay

Product Type	Product Code	Power (W)	Weight (kg)
65 W (4000K)	LNE 010U 40OD00 1K0 030 ST V.3	9,9	0,8
96 W (4000K)	LNE 020U 40OD00 2K1 053 ST V.3	18,9	1,1
130 W (4000K)	LNE 023U 40OD00 2K8 085 ST V.3	22,3	1,6
137 W (4000K)	LNE 023U 40OD00 2K9 125 ST V.3	22,6	2,2
183 W (4000K)	LNE 030U 40OD00 3K9 085 ST V.3	31,2	2,2
183 W 4000K DALI	LNE 030U 40OD00 3K9 085 ST V.3	31,2	2,2
183 W 4000K DALI 3H ACK	LNE 038U 40OD00 4K8 085 ST V.3	37,4	1,6

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Ball Prof CE CB KEMA KEUR

EAE

REVOLED-S V.2

RAF

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +45 °C

REVOLED-S V.2, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED IP65 DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	: Miro silver reflector
Diffuser	: Extra narrow angle, safety tempered glass
Light Source	: Mid Power LED
Power	: 47 W / 57 W / 74 W / 87 W / 128 W
Lumen	: 46072 lm / 7212 lm / 9131 lm / 11053 lm / 15669 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

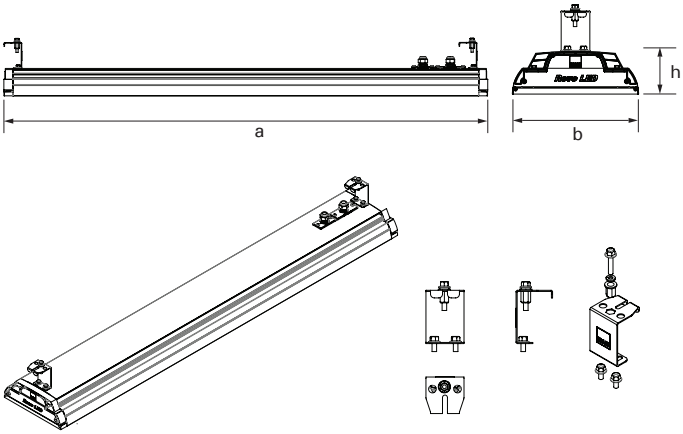

Photometric Curve



RAF

Dimensions (mm)

RAF

Type	a	b	h
46 W	775	223	75
57 W	775	223	75
74 W	954	223	75
87 W	1139	223	75
128 W	1412	223	75

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Weight (kg)
47 W 4000K	RVL 048U 40TF00 XL 6K00 V.2	7,2
57 W 4000K	RVL 058U 40TF00 XL 7K20 V.2	7,2
74 W 4000K	RVL 074U 40TF00 XL 9K13 V.2	8,7
87 W 4000K	RVL 087U 40TF00 XL 11K0 V.2	10,2
128 W 4000K	RVL 128U 40TF00 XL 15K6 V.2	12,9

Ball Prof

REVOLED-S V.2

EVOLUTION RAF

INDUSTRY LIGHTING LED LUMINAIRES

-25 °C +40 °C

REVOLED-S V.2 EVOLUTION, which blends in with many sectors from high ceiling to low ceiling, from food facilities to automotive sector, provides many advantages such as high energy savings, ease of maintenance, long useful life, job safety, and many other subjects.

LED IP65 DALI

Technical Specifications

Housing	: Aluminium profile housing and PC side cover
Optical	: Miro silver reflector
Diffuser	: Tempered glass with safety film
Light Source	: Mid Power LED
Power	: 40 W / 70 W / 110 W / 135 W
Lumen	: 4721 lm / 9340 lm / 14604 lm / 17740 lm
Input Voltage	: 220-240V AC 50/60Hz
Color Temp.	: 3000K / 4000K / 5700K / 6500K
CRI	: >80
IP	: IP65
Installation	: Surface mounted
Colors	: RAL 9006

Technical Drawing

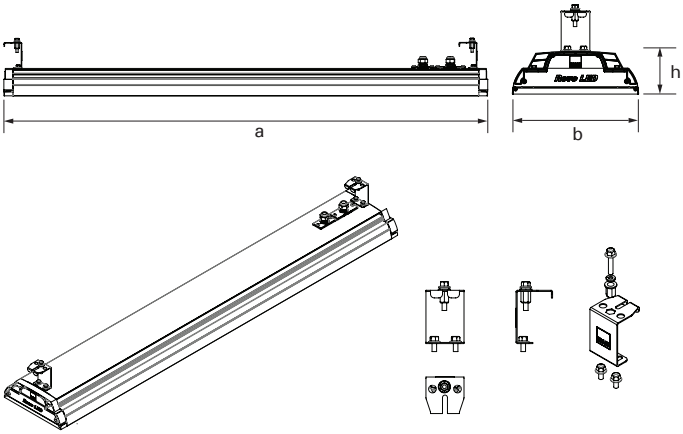

Photometric Curve



RAF

Dimensions (mm)

RAF

Type	a	b	h
40 W	338	223	75
70 W	688	223	75
110 W	1000	223	75
135 W	1310	223	75

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
40 W (4000K)	RVL 040U 40TF00 XL 4K72 V.2 EVO	65,3	3,7
70 W (4000K)	RVL 070U 40TF00 XL 9K33 V.2 EVO	96,4	6,2
110 W (4000K)	RVL 110U 40TF00 XL 14K6 V.2 EVO	130,8	9,3
135 W (4000K)	RVL 135U 40TF00 XL 17K7 V.2 EVO	137,5	9,3

Ball Prof CE CB KEMA KEUR 05 EAC

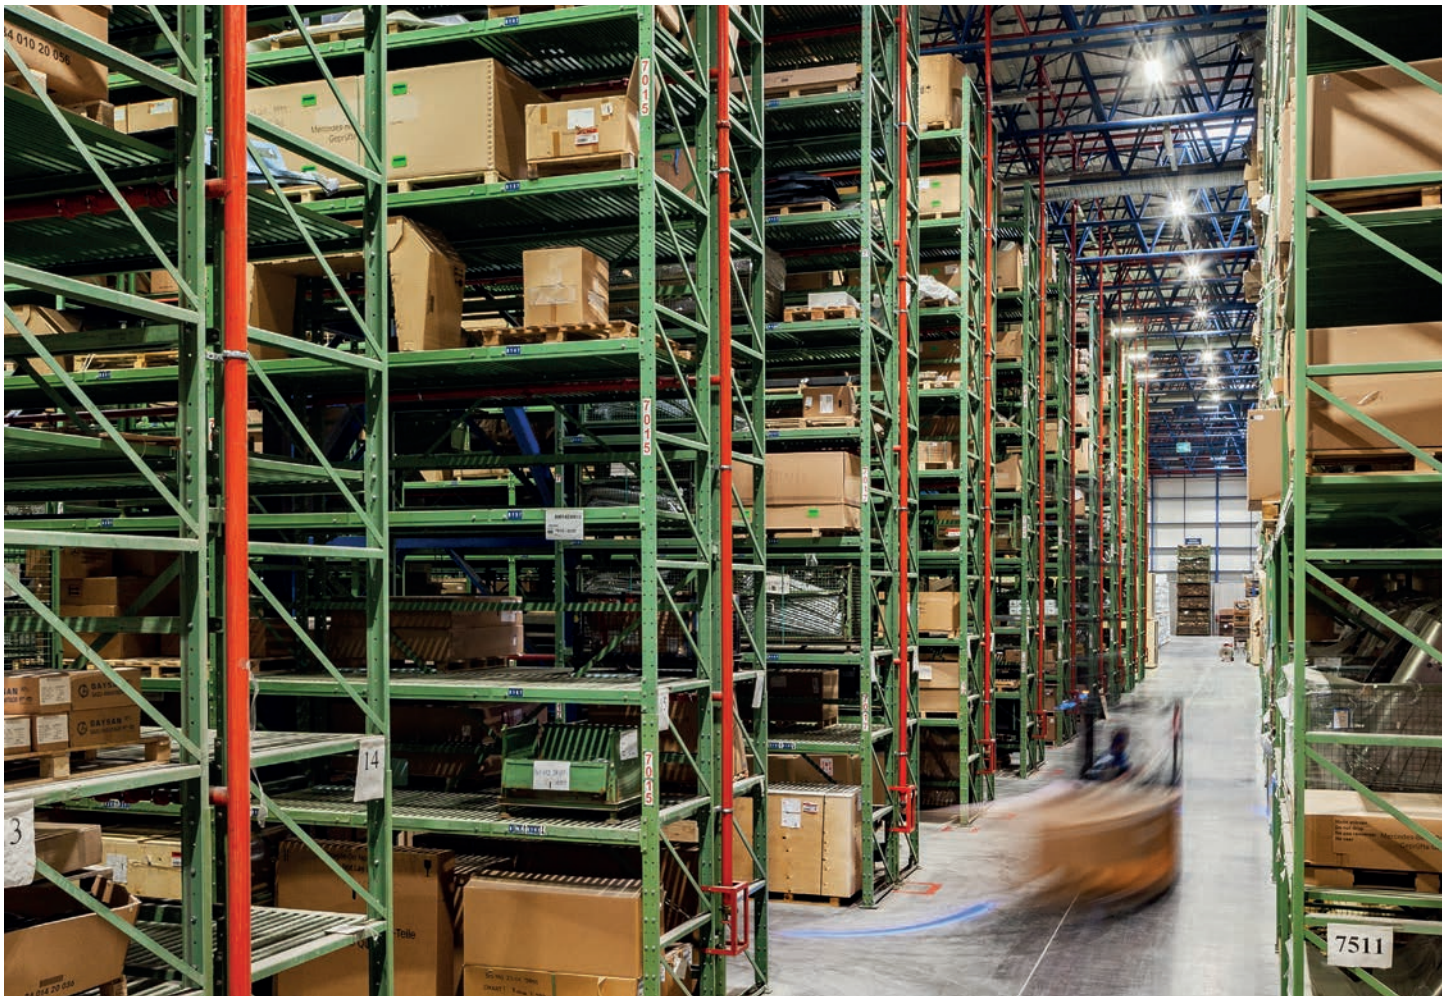

R V L

Group Code

U

Ceiling type

U = Surface Mounted

Product Wattage

040 = 40 W
070 = 70 W
110 =110 W

Kelvin

65 = 6500K
57 = 5700K
40 = 4000K
30 = 3000K

Diffuser Type

TF = Single Film Glass
CF = Double Film Glass

Driver Type

00 = Standard
01 = 1 Hourse ACK
02 = 3 Hourse ACK
03 = Dali
04 = Dali Driver + 1 Hours ACK
05 = Dali Driver + 3 Hours ACK

Optic

AR = Arena
LB = Lowbay
XL = Raf
90 = Sabic

K

Lumen

5K20 = 5200 Lm
9K45 = 9450 Lm
14K8 = 14800 Lm
15K6 = 15600 Lm
.....

V

Version

V.2 = Version 2

V.2 Industry = Version 2 industry

V.2 SC = Version 2 sabic

V.2 SC Industry = Version 2 sabic industry

V.3 = Version 3

V.3 Industry = Version 3 industry

V.3 SC Industry = Version 3 sabic industry

V.3 Industry Plus = Version industryl plus

Evolution V.3

Model

EVO = Evolution

THERMAL SPECIFICATIONS

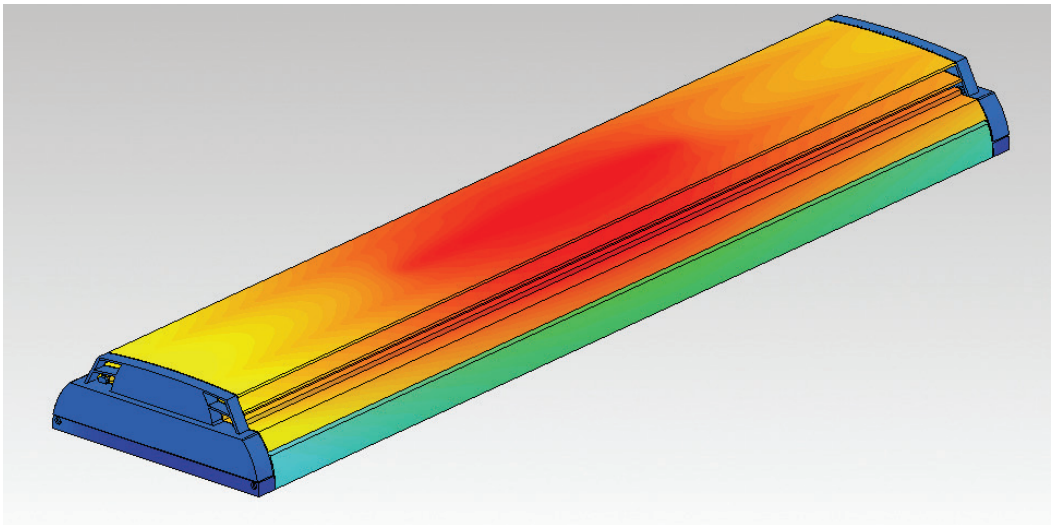

THERMAL DESIGN

Body thermal design provides high level of temperature transfer so that it endures -40 .. + 650C environment temperature with use of -25 .. + 45 ^{0}C industrial power sources, in standard products.

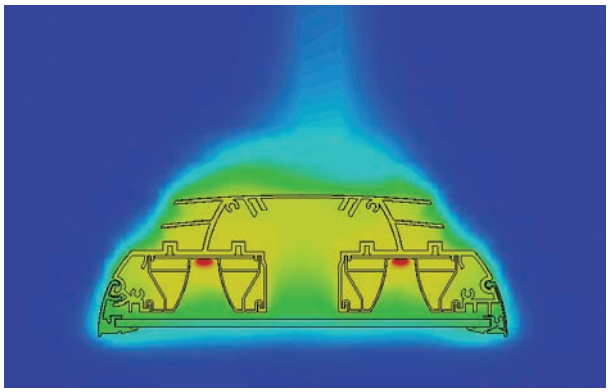

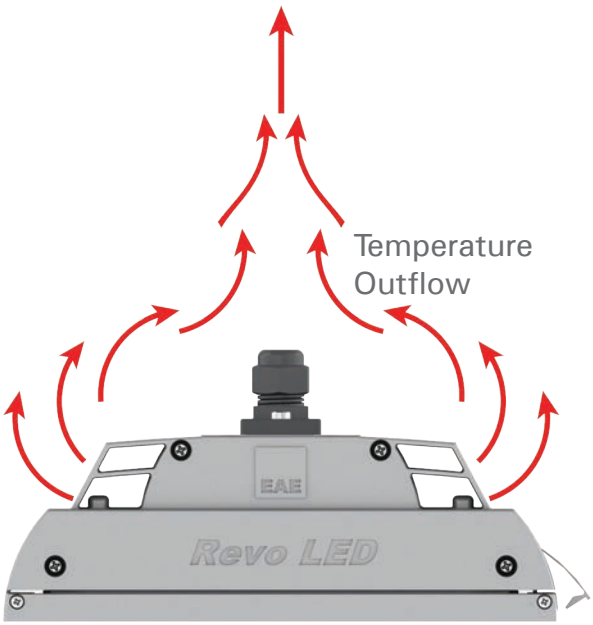

THERMAL ADVANTAGES

First 1 year	1 year later	
		**REVOLED-S**

It disenables dust and particle accumulation thanks to its patented housing structure so that non-productivity on heat transfer is never experienced even year later.

		**Reference Product 1**

Their heat transfer decreases and armatures get hot over time because flat housing design without fin enables dust accumulation.

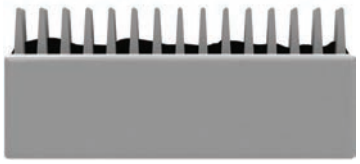	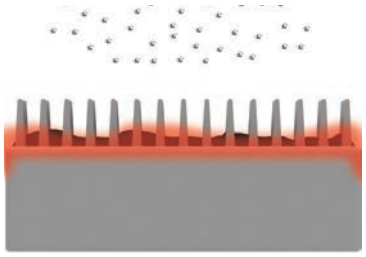	**Reference Product 2**

Finned Housing Designs enable dust and particle accumulation between fins so that heat transfer becomes difficult and it expires in a small amount of time because armature becomes hot.

COMPARISONTABLE (According to Metal Halide)



Metal Halide
400 W

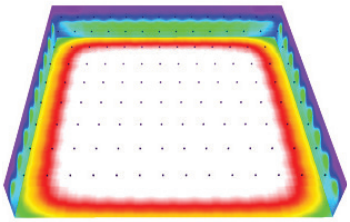

REVOLED-S SC
127 W

400 W METAL HALIDE

REVOLED-S SC 127 W

ILLUMINATION LEVEL	300lux	300lux
AMOUNT OF ARMATURE	196	160
POWER ARMATURE	450 W	127 W
TOTAL POWER CONSUMPTION	88,2kW	20,3kW

* Analyze table is prepared for change projects.

Revoled-S
SAVING RATE

REVOLED-S
METAL HALIDE

Payback for new investment
0,6 years

COMPARISONTABLE (According to Revo Fluorescent)



REVO FLOURESAN
4*54 W

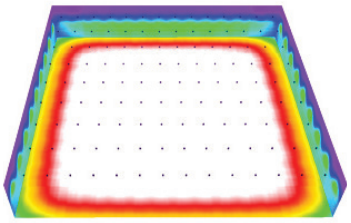

REVOLED-S SC
127 W

4*54 W REVO

REVOLED-S SC 127 W

ILLUMINATION LEVEL	300lux	300lux
AMOUNT OF ARMATURE	210	160
POWER ARMATURE	232 W	127 W
TOTAL POWER CONSUMPTION	48,7kW	20,3kW

* Analyze table is prepared for change projects.

Revoled-S
SAVING RATE

REVOLED-S

REVO FLOURESAN

Payback for new investment

1,4 years

REVOLED-S

Light Engineering in the Industry

EAE LIGHTING-Brochure REVOLED-S - EN - Uptade Date: 05.04.2021
EAE, is provided with the right to perform changes deemed necessary without notifying in advance.
Please contact us for further information about products and details partaking in catalogue.

EAE LIGHTING

EAE LIGHTING Inc.
Ikitelli Organize Sanayi Bolgesi
Eski Turgut Ozal Caddesi No:20
Basaksehir / ISTANBUL - TURKEY
Tel : +90 212 413 21 00 (pbx)
Fax : +90 212 549 37 90
www.eaelighting.com

Available on the App Store

ANDROID APP ON Google Play

/eaegroup /eaegroup /eaegroup /eaecorporate /eaegroup /eaegroup

engineering the light