



BRICK

Surface Mounted

Surface Mounted 18 W Spot LED Luminaire

Order Code : 3179904
Product Code : ESP 018U 400D00 35 LLL BR V.2 2X FLP



Product Data

Standard Features


| | |
|--------------------|---------------------|
| Housing | : Aluminium housing |
| Diffuser | : 35° Reflector |
| IP Grade | : IP20 |
| Installation | : Surface mounted |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 18 W |
| Final Luminous Flux | : 1975,5 lm |
| Efficacy | : 109,75 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

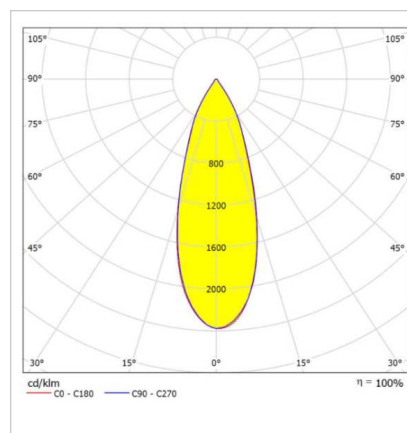

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Impact Resistance | : IK02 |
| Led Life Time - L70 | : > 50.000 hours @Ta= 35 °C |

Optional Features

| | |
|-------------------------------|-----------------|
| Correlated Color Temperatures | : 3000K / 6500K |
| DALI Option | : Yes |
| Degree Option | : 15° / 50° |



BRICK Surface Mounted

Surface Mounted 18 W Spot LED Luminaire

3179904 ESP 018U 400D00 35 LLL BR V.2 2X FLP

Dimensions (mm)

| | a | b | h |
|----------|-----|----|-----|
| Standart | 162 | 90 | 120 |

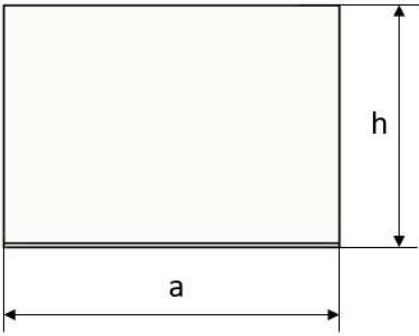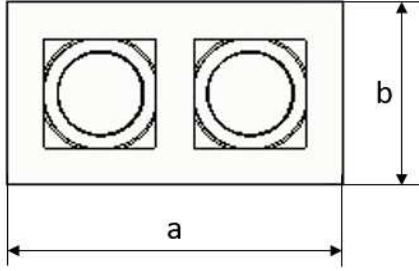

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) F:
www.eaeaydinlatma.com.tr

Revision date: 24.03.2021