



## CITY POLE

35 W Parks and Gardens LED Lighting Luminaire



Order Code : 3337628  
Product Code : CTY 035Z 40LN00 4K1 66 PL 4H FLP

### Product Data

#### Standard Features


Housing	: Aluminium Housing (Chromate Conversion Pretreatment)
Optic	: Lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: SMD LED

#### Optical & Electrical Features

Power Consumption	: 35W
Final Luminous Flux	: 4060 lm
Efficacy	: 116 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

### Photometric Curve

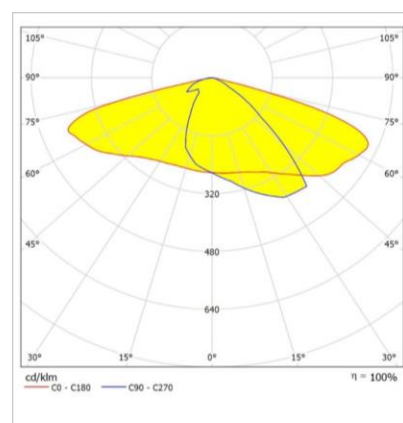

#### Other Features & Conditions

Operating Temperature Range	: -20°C / +45°C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C

#### Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


# CITY POLE

35W Parks and Gardens LED Lighting Luminaire

3337628 CTY 035Z 40LN00 4K1 66 PL 4H FLP

## Dimensions (mm)

	a	b	h	h1
Standart	150	100	4000	850

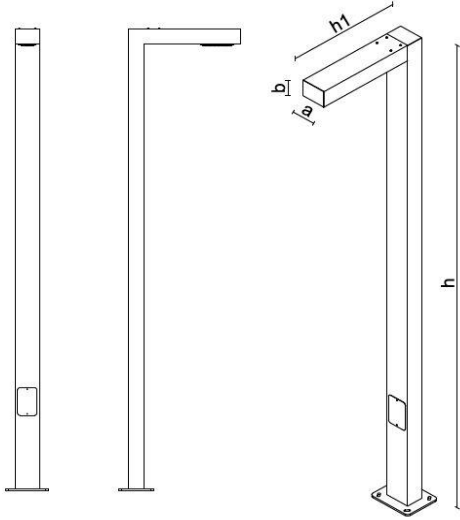

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 649 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 18.03.2024