



# GIZA L4 VERTICAL SEMI RECESSED

Recessed Mounted 12 W Spot LED Luminaire

Order Code : 3270706  
Product Code : GZA 012Q 40LN00 50 1K2 20 L4 VR ADJ FLP



## Product Data

### Standard Features


Housing	: Aluminium Housing
Optic	: 50° Lens + Reflector (Black)
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

### Optical & Electrical Features

Power Consumption	: 12 W
Final Luminous Flux	: 1209 lm
Efficacy	: 100 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

## Photometric Curve

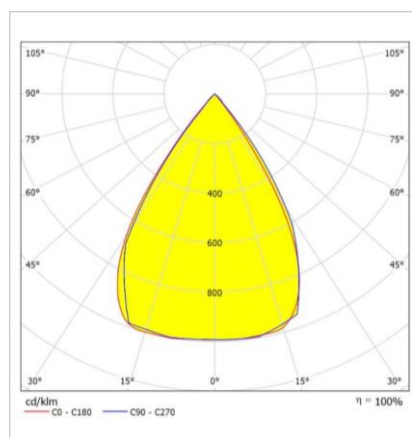

### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 hours @Ta= 35 °C

### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 80°



## GIZA L4 VERTICAL SEMI RECESSED

Recessed Mounted 12 W Spot LED Luminaire

3270706 GZA 012Q 40LN00 50 1K2 20 L4 VR ADJ FLP

### Dimensions (mm)

	a	b	h	h2	Ø
Standart	170	50	52	238	90

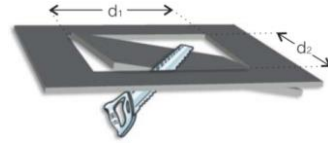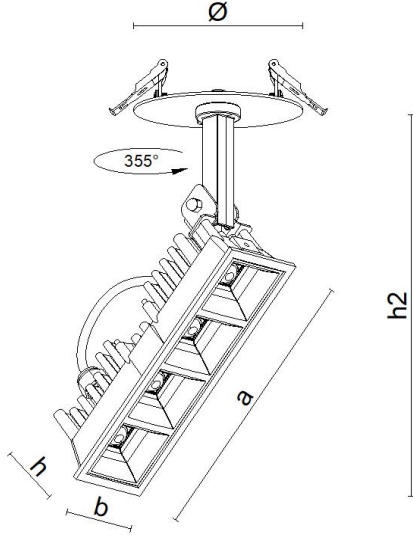

### Weight (kg)

Standard	0.750
----------	-------

• EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 15.02.2024