



ALBA

60 W LED Lighting luminaire for street Lighting



Order Code : 3328346
Product Code : ALB 060D 40LN00 100 10K0 ELP 70CRI

Product Data

Standard Features

Housing	: Aluminium Injection
Optic	: 100° lens
IP Grade	: IP66
Installation	: Pole mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off


Optical & Electrical Features

Power Consumption	: 62.5 W
Final Luminous Flux	: 10015.3 lm
Efficacy	: 160.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Other Features & Conditions


Operating Temperature Range	: -25 °C/ +50 °C
Impact Resistance	: IK05
Led Life Time - L70	: > 72.000 saat @Ta= 50 °C

Photometric Curve

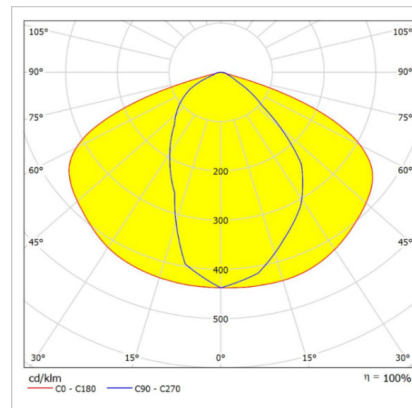

Optional Features

Correlated Color Temperatures	: 6500K
DALI Option	: Yes

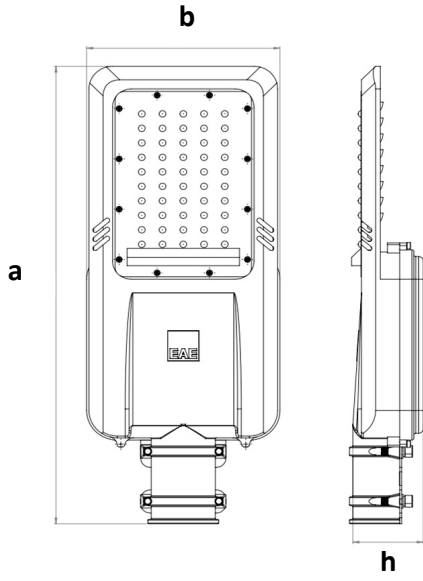

ALBA

60 W LED Lighting luminaire for street Lighting


3328346 ALB 060D 40LN00 100 10K0 ELP 70CRI

Dimensions (mm)

	a	b	h
Standard	505	205	74,5

Weight (kg)

Standard	1.4
----------	-----

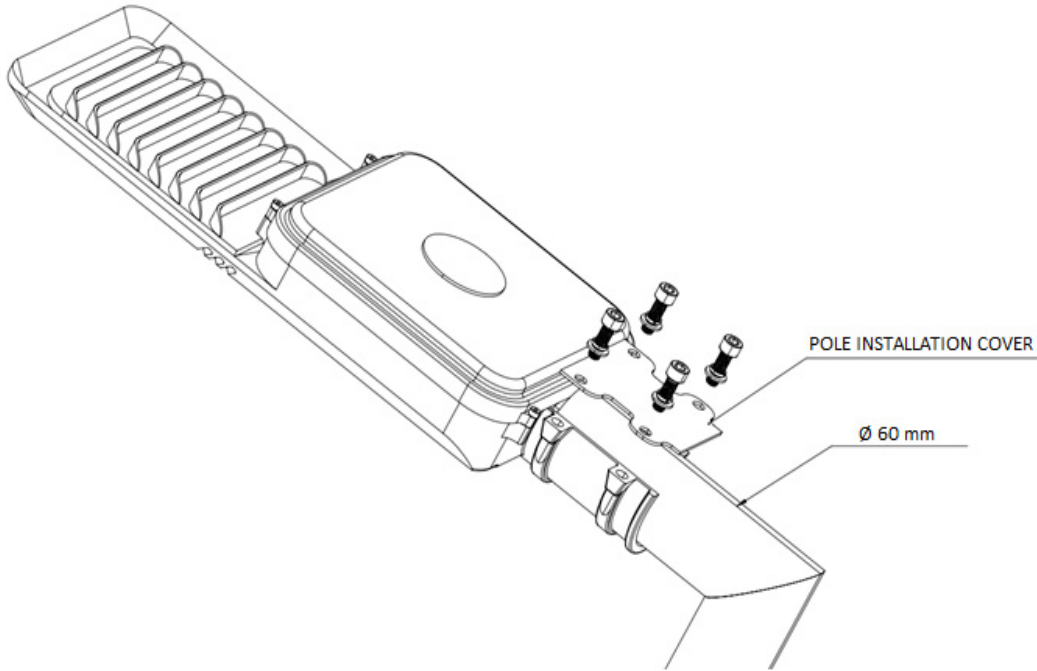

- EAE, reserves the right to make changes without prior notice.



Revizyon tarihi: 06.08.2024