



## REVERO

Surface Mounted 70 W LED High Bay Luminaire



Order Code : 3225765  
Product Code : REV 070U 40PR00 90 9K29 AL

### Product Data

#### Standard Features

Housing	: Aluminum injection housing
Diffuser	: Prismatic Diffuser
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: Mid Power LED
Color Housing	: S23164 (REY)


#### Optical & Electrical Features

Power Consumption	: 70.3 W
Final Luminous Flux	: 9294 lm
Efficacy	: 132.1 lm/w
Input Voltage	: 220-240 V
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Impact Resistance	: IK05
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

### Photometric Curve

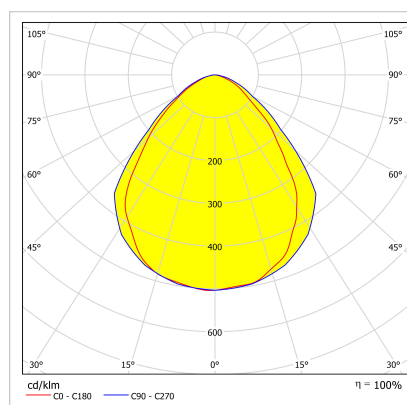



#### Optional Features

Correlated Color Temperatures	: 6500K
DALI Option	: Yes
Emergency Kit Option	: 1 hour

## REVERO

Surface Mounted 70 W LED High Bay Luminaire


3225765 REV 070U 40PR00 90 9K29 AL

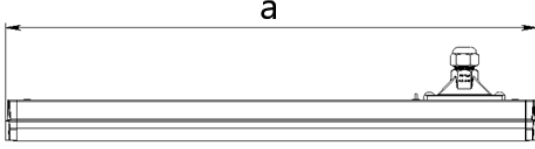

Dimension (mm)

	a	b	h
Standart	523	148	92


### Suspension Set

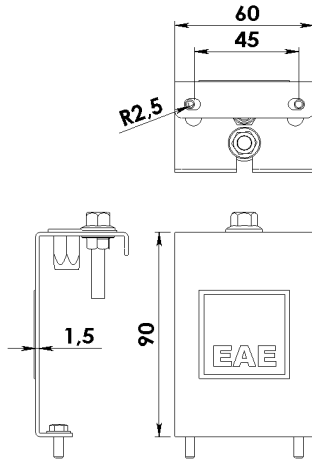

Cable Tray and Wall Hanger Set

Order Code : 3240970


Product Code : REVERO TAVA ASKI TK - ALM

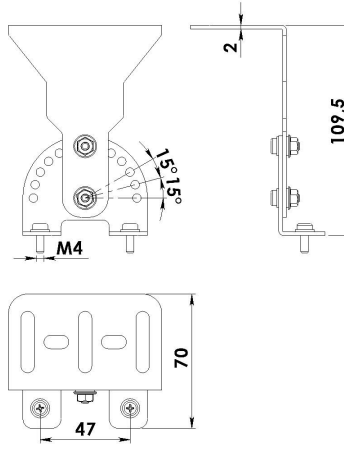

Graded Hanger Set

Order Code : 3248493

Product Code : REVERO DERECELİ ASKI TK - ALM

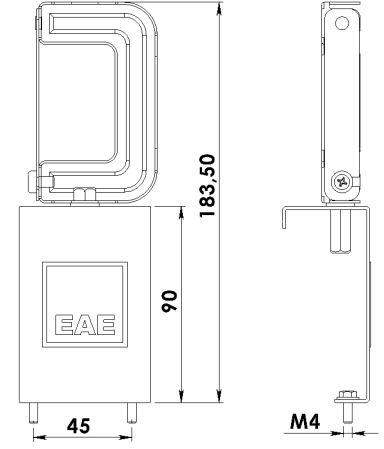

Bara Hanger Set

Order Code : 3246794

Product Code : REVERO BARA ASKI TK - ALM

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 23.12.2021